


Engineered to Perform



TS11204 - High Performance Cam Action Closer

The TS11204 high efficiency door closers are 'Engineered to Perform' assisting door sets meet the requirements of Approval Document M and BS8300 recommendations.

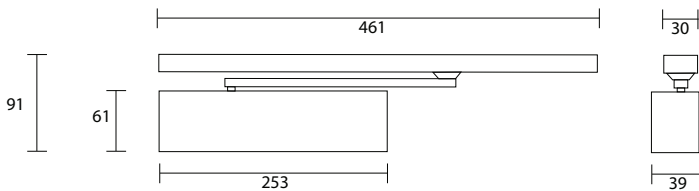

All dimensions in mm.

BS EN 1154 Classification

TS11204 door closers have been independently tested to conform with the EN 1154 performance standard. They are CE marked and classified as follows:



BS EN 1634 Fire Test

TS11204 closers have been tested to EN 1634 Test certificates are available on request.

Product Specification

Power size (adjustable by spring)	
EN2	Optional
EN3	Yes
EN4	Optional
Mechanism	Cam Action
Adjustable closing speed	Yes
Adjustable latch action	Yes
Max door width (mm)	1100
Max door weight (kg)	80
Opening angle	120°
LH and RH doors - universal application	Yes
Fire Rated (BS EN 1634-1: 2000)	Yes
Tested to BS EN 1154-1997	Yes
CE marked	Yes (EN3)


TS11204 Series Options

Mechanical hold open slide rail	Optional
Electro magnetic slide rail	Optional



Certificate No. WQM 132

TS11204 Kit

Description	EN Size	Finish	Product Code	Price (\$)
 <p>TS11204 concealed slide arm door closer Combined Unit (with 'TS-B' rail and connector bar)</p>		Satin Nickel	TS.11204.SR.B.SNPSNPZ	291.90
<small>Others finishes available on request; Silver, Polished Nickel, Electro Brass & Polished Stainless Steel (316 Grade.) See page 39 for details.</small>				

